



## Perfect Personal Firewall/VPN Security Solution

### Benefits

#### Proactive End-point Security

Stay in a secure and trusted LAN, and you still need personal and private protection. The easy-to-pack, compact network device is equipped with advanced safety and security features connect you to the LAN or Internet through any broadband connection. With a powerful SPI Firewall and Network Outbreak Prevention, it behaves as one of the frontline protection for individual PC from Internet attacks.

#### Portable, Secure, Personal Security Appliance

With the light-weight, compact device, the ZyWALL P1 also provides VPN connection for mobiles users to create a private secure hotspot for yourself whenever you go. No extra sophisticated software installation and configuration effort needed. Once you're connected over VPN, it's just like being attached to the local network.

#### Ease of Deployment

Comparing with software-based applications, the ZyWALL P1 is a truly plug-and-play, hardware-based personal security device. It avoids software installation complexity by benefiting more from ease-of-trouble shooting and management effort. Besides, a familiar web browser interface and setup wizard makes installation and configuration easier.

With USB power, you don't need extra adaptor  
Establishes an IPSec VPN tunnel to your corporate network  
Advanced SPI Firewall protects your PC, whenever and wherever you connect

Personal Internet Security Appliance

ZYWALL P1

## System Specifications

## Specifications

### Firewall

SPI Firewall

DoS/DDoS Prevention

### VPN

1 IPSec VPN Client (DES/3DES/AES)  
Authentication with X.509 certificates  
MD5, SHA-1, IKE

DES/3DES/AES Encryption (Hardware)  
Authentication with PSK  
XAuth (Only Client)

### Networking

DHCP client/server

DDNS Client

SUA (Many to one)

### Remote Administration

HTTPS, SSH, SNMP v2

### Anti-Virus/IDP/Anti-Spam\*

Vantage CNM 2.2 support\*

### Performance

VPN Throughput: 30Mbps

Firewall Throughput: 80Mbps

## Hardware Specifications

LAN Interfaces: 10 / 100Base-T Ethernet, full duplex RJ-45 connectors

WAN Interfaces: 10 / 100Base-T Ethernet, full duplex RJ-45 connectors

LED Indicators: Power, VPN, WAN, LAN, Vantage

Power: USB or External 5V Power adaptor

## Environmental Specifications

Temperature: 0°C to 50°C

Humidity: 20 % to 95 % ( non-condensing )

Dimension: 128.5(L) x 81.5(D) x 20(H)mm

Weight: 130g

Anti-Virus/IDP/Anti-Spam\*


## Certification

UL/CSA


CE mark, EN60950

\* Firmware upgradeable for future enhancement

## Personal Firewall Applications

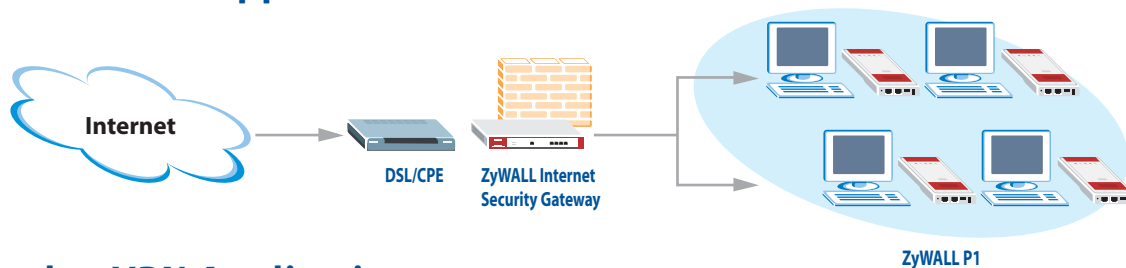

## Tele-worker VPN Applications

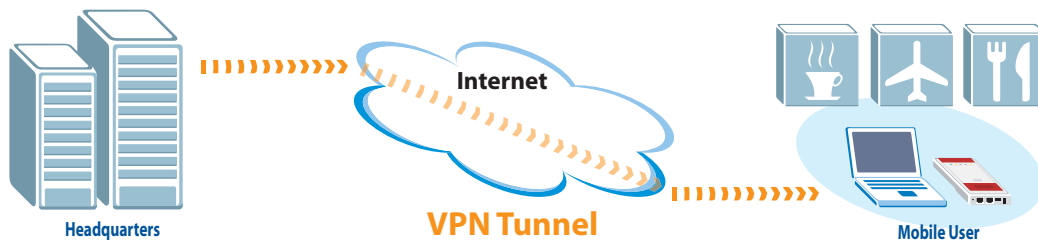

For more product information, visit us on the web [www.ZyXEL.com](http://www.ZyXEL.com)

**Corporate Headquarters**  
**ZyXEL Communications Corp.**  
Tel: +886-3-578-3942  
Fax: +886-3-578-2439  
Email: sales@zyxel.com.tw  
<http://www.zyxel.com>

**ZyXEL Czech s.r.o.**  
Tel: +420 241091350  
Fax: +420 241091359  
Email: info@cz.zyxel.com  
<http://cz.zyxel.com>

**ZyXEL North America**  
Tel: +1-714-632-0882  
Fax: +1-714-632-0858  
Email: sales@zyxel.com  
<http://www.us.zyxel.com>

**ZyXEL Denmark A/S**  
Tel: +45 39 55 07 00  
Fax: +45 39 55 07 07  
Email: sales@zyxel.dk  
<http://www.zyxel.dk>

**ZyXEL Norway A/S**  
Tel: +47 22 80 61 80  
Fax: +47 22 80 61 81  
Email: sales@zyxel.no  
<http://www.zyxel.no>

**ZyXEL Finland Oy**  
Tel: +358-9-4780 8400  
Fax: +358-9-4780 8448  
Email: sales@zyxel.fi  
<http://www.zyxel.fi>

**ZyXEL Spain**  
Tel: +34 902 195 420  
Fax: +34 913 005 345  
Email: sales@zyxel.es  
<http://www.zyxel.es>

**ZyXEL France SARL**  
Tel: +33 (0)4 72 52 97 97  
Fax: +33 (0)4 72 52 19 20  
Email: info@zyxel.fr  
<http://www.zyxel.fr>

**ZyXEL Sweden A/S**  
Tel: +46 31 744 7700  
Fax: +46 31 744 7701  
Email: sales@zyxel.se  
<http://www.zyxel.se>

**ZyXEL Germany GmbH.**  
Tel: +49 2405 6909 0  
Fax: +49 2405 6909 99  
Email: sales@zyxel.de  
<http://www.zyxel.de>

**ZyXEL UK Ltd.**  
Tel: +44 (0) 8702 909090  
Fax: +44 (0)8702 909091  
Email: sales@zyxel.co.uk  
<http://www.zyxel.co.uk>